

# i-GATE DUAL

Unlock access with a call – GSM advanced switch supporting wireless e-loops and future cloud integration.



E-loop integration plugin PCB.



RGB status for instant indication of devices network connectivity.



Push-to-exit select relay 1 or 2 and also set active times of operation.




Automatic Daylight Saving Time (DST) setting.



Customisable SMS replies to Trigger Latch and Unlatch commands.



Programmable with the AES GSM APP.

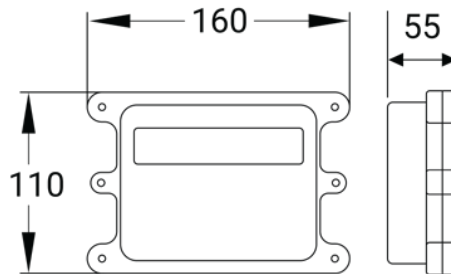

DIMENSIONS FOR i-GATE DUAL



Automatic APN detection on selected major networks.



Remote sms diagnostics features including modem reboot and dial test.



Regular status reports-choose between daily and weekly reports to confirm online status.




Comprehensive Events Log including automatic openings, push-to-exit events, and SMS and E-Loop operations.

## GSM CLOUD PORTAL (COMING SOON!)

With the **AES Cloud Portal**, building managers and installers can remotely program and manage their **i-Gate Dual** units anytime, from any locations.

- Reduce SMS messaging
- User-friendly interface
- Simplified intercom management
- Remote programming

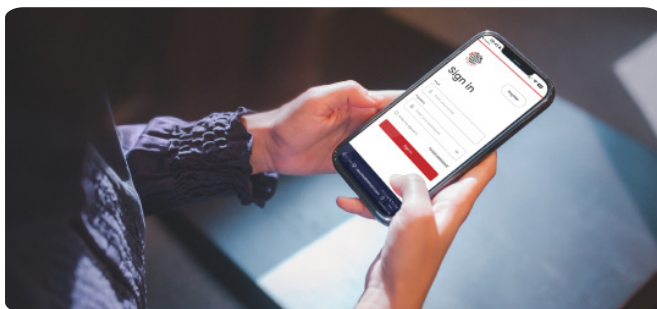

Details	
Weather rating	IP67
Relays	2
Relay Type	N/C and N/O
Relay Load	5A, 24V AC Max
Power Consumption	30mA (Standby), 80mA (When Called)
Modem Model	4G EU, 4G AU, 4G US
Power	12-24V AC/DC (not supplied)
Caller ID numbers	1280
Time Restricted Caller ID Numbers	250
Automatic Trigger Events per Week	50
Push-to-Exit Timed Events per Week	5

