

INSTALL A SLIDING GATE WHEEL TO FRAME



STEP 1


Using a suitable pencil or pen mark out two 32mm wide x 100mm rectangles on the underside of your bottom rail. The main frame has two score marks to indicate the width at 32mm which when cut will provide a 35mm wide slot required for the wheel. Bring the wheels in at least 500mm from each end to avoid the corner stakes.

Next using a suitable saw carefully cut the rectangle out. A fine cutting blade is best for this task. Clean the edges with a small file.



STEP 2

After cleaning out the offcut and any swarf check the size of the cutout by inserting your wheel and spinning the wheel by hand to ensure it turns freely and there are no obstructions.

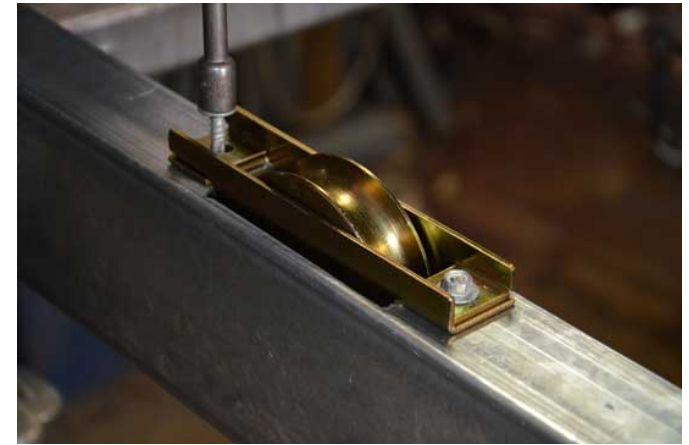

STEP 3

Either drill and screw or use a self drilling screw and fix your wheels in place with two screws each.

Do not apply grease or lubricants to the wheels or track as this will simply pick up dirt and damage your wheels.

